



# Blackberry 7105t Disassembly

Written By: kelogan



## INTRODUCTION

This guide outlines how to do initial disassembly for the device and doubles as prerequisites for other guides.


---



### TOOLS:


- [iFixit Opening Tools](#) (1)
-

## Step 1 — Blackberry 7105t Disassembly

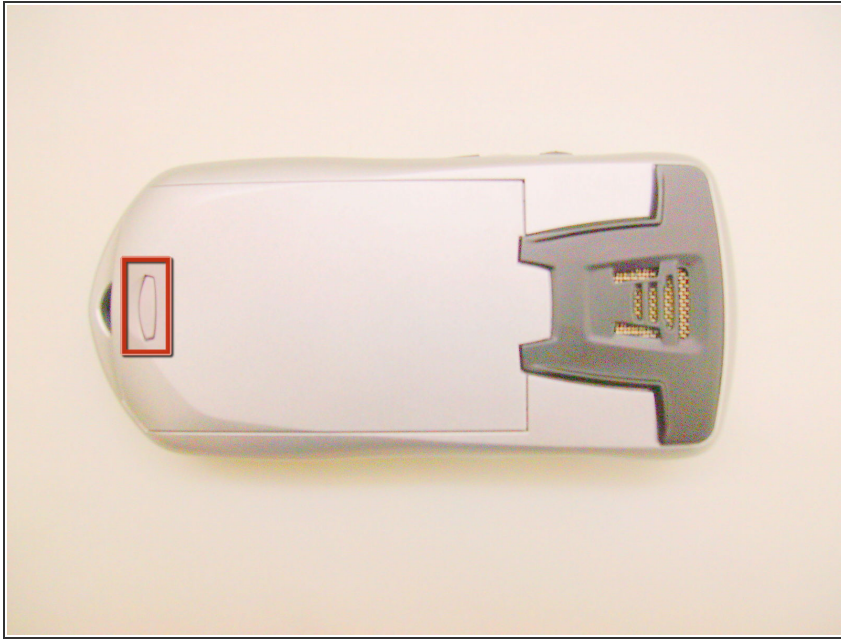

- With the back of the device facing you, press down on the button while sliding the battery casing away from the speaker to remove it.


## Step 2

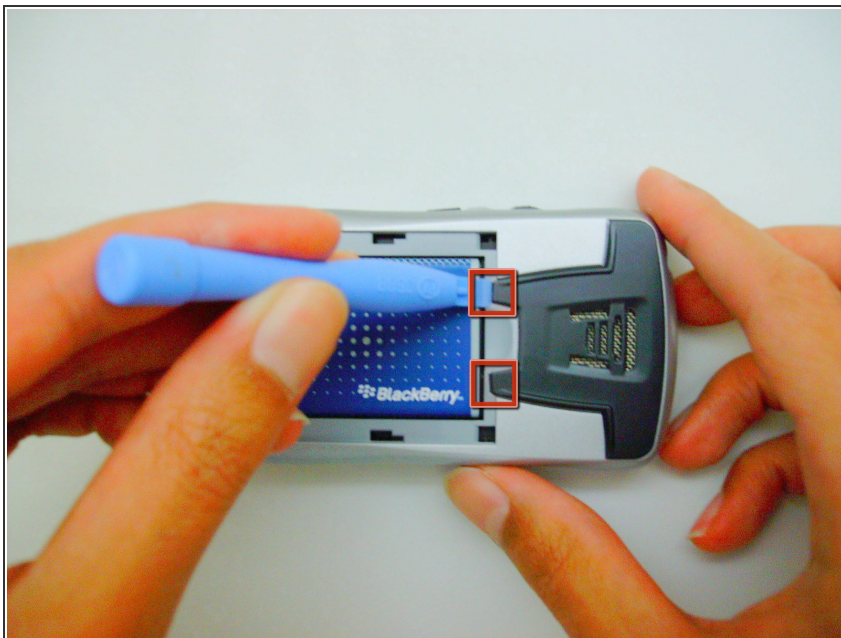

- Use a plastic opening tool or fingernails to unclip the two hinges of the speaker covering and remove it.



## Step 3

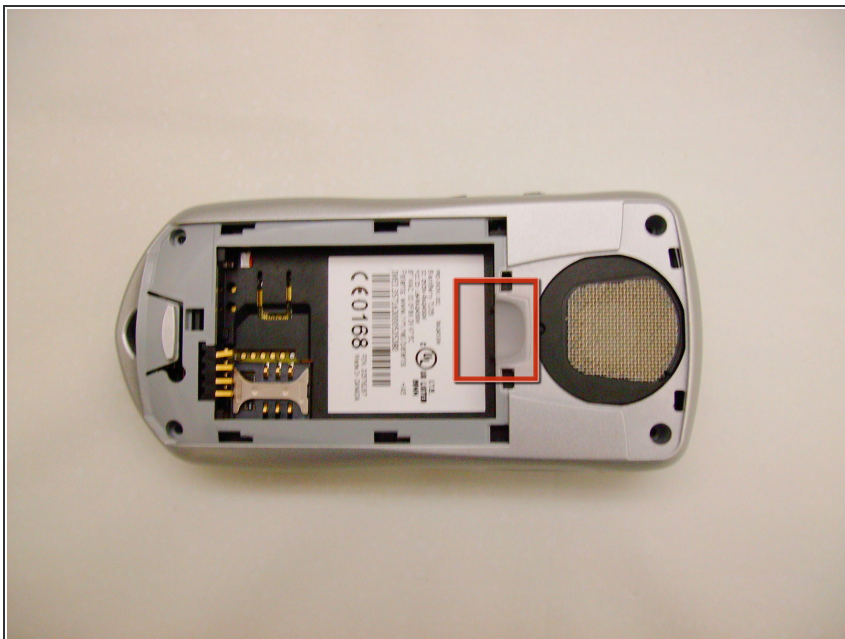


- Remove the battery by pushing against it from the right and then pulling towards you.

## Step 4



- Remove the four screws indicated in the picture with a #T6 Torx Bit screwdriver and set them aside.

## Step 5

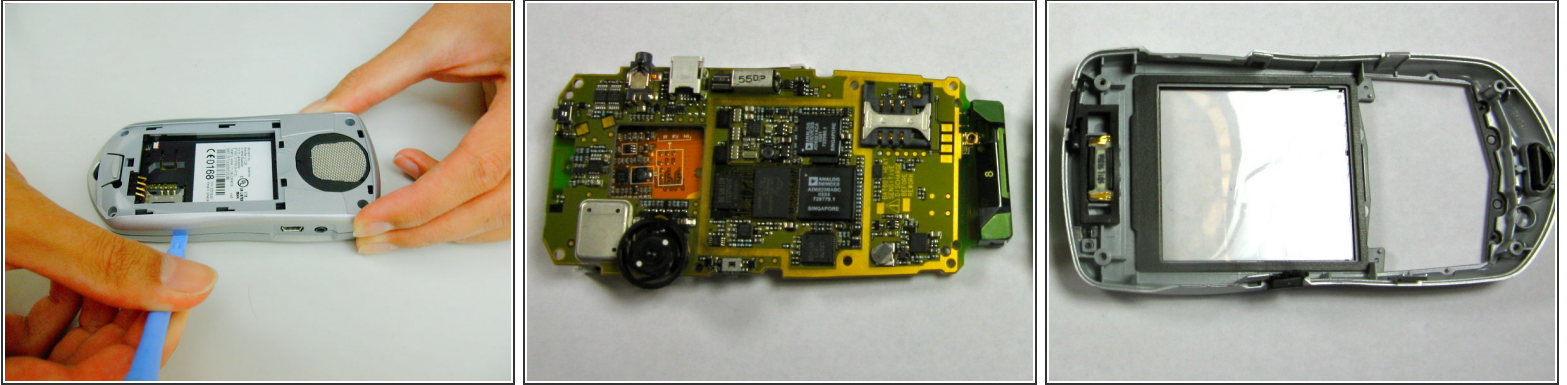


- Use a plastic opening tool or your fingernails to remove the plastic backing.
- Start with the seam indicated in the picture and slide the plastic opening tool until the case is separated.

## Step 6



- Unscrew the four screws indicated in the picture with #T6 Torx Bit screwdriver.
- Place the four screws released from the phone in a plastic bag.

## Step 7

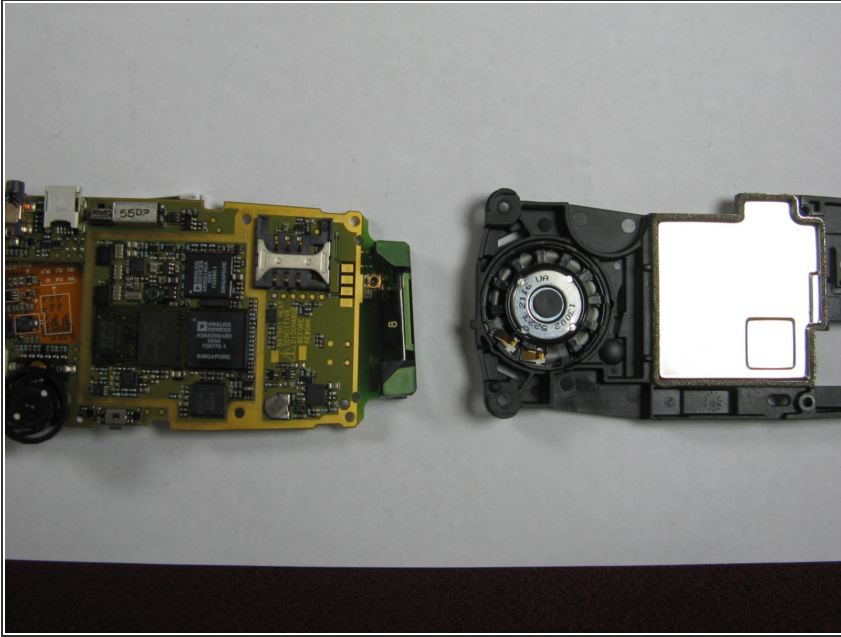

- The black battery casing and logic board can now be separated for the following steps.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 11:54:11 AM.